
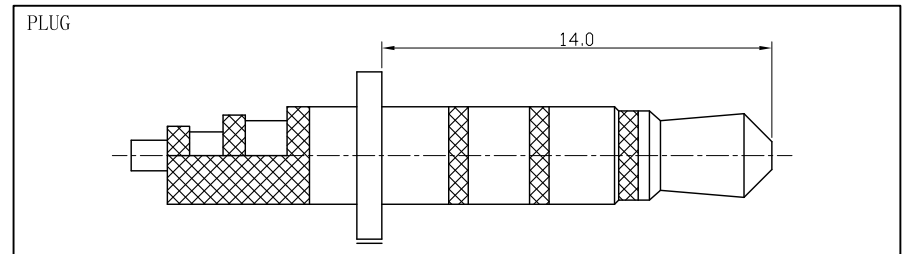


SPECIFICATION
 1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 0.03 \Omega$;
 3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-20N;
 6. life test: 5,000 cycles.

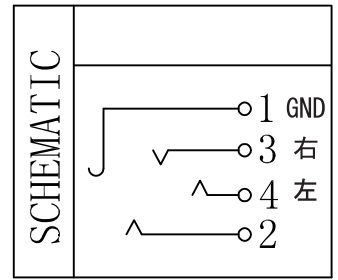

5	HOUSING	1	PBT	
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
3	3# CONTACT FOOT	1	BRASS	Sn-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

STRAWBERRY LINUX CO.,LTD.

DESCRIPTION(内容)
PHONE JACK 4PIN TYPE
 PART NO:
 (料 號) **PHONE JACK**
 DWG NO(圖號):

DRAWN(製圖)
 CHECKED(確認):
 APPROVAL(核准):

GENERAL TOLERANCE:
 (公差)
 .X ± 0.30
 .XX ± 0.15
 SCALE(比例):
 1:XX

REV: **A**
 UNIT:
mm
 SIZE:
A4
 SHEET:
1/1

REV	DESCRIPTION	DATE
1		
2		
3		
4		