
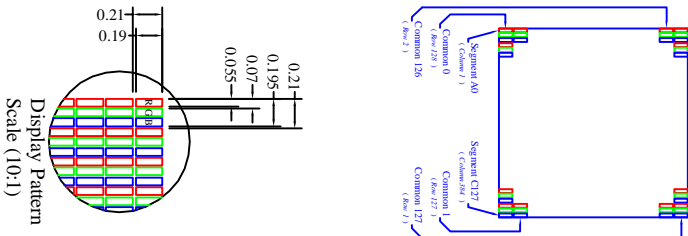
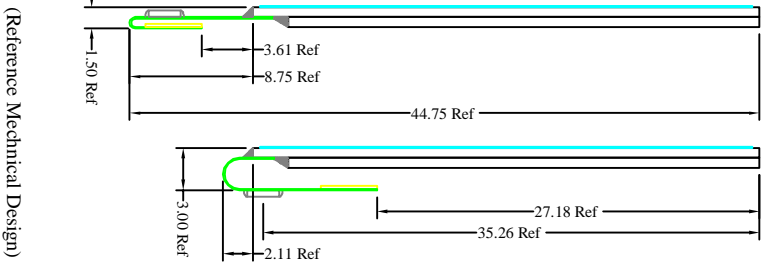


- Note:
1. Driver IC: SSD1339
 2. Die Size: 2095µm x 2250µm
 3. COF Number: UT-0239-F02
 4. Interface: 8~9bit 68XX/80XX Parallel, 4-wire SPI
 5. General Tolerance: ±0.30
 6. The total thickness (1.60 Max) is without panel protective film.
 7. The actual assembled total thickness with above materials should be 1.75 Max.

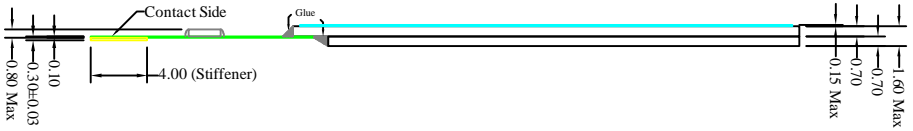

Pin	Symbol
1	NC
2	NC
3	VCOMH
4	VDDO
5	VSS
6	PS
7	D7
8	PS
9	D1
10	D2
11	D3
12	D4
13	D5
14	D6
15	E
16	RAW
17	BS1
18	BS2
19	CS
20	RST
21	VB
22	VB
23	VP-C
24	VP-B
25	VP-A
26	VREF
27	VDD
28	VSS
29	VCC
30	NC

Customer Approval
Signature

Univision Technology Inc.

Unless Otherwise Specified
Unit: mm
General Roughness: $\sqrt{0.4}$
Title: UG2832GHEFP01 Folding Type OLED Display Module
Part Number: 128R8GB x 128.561/44 Colors, COF Package

Dimension	Tolerance	By	Drawn	Checked	Reviewed	PM
Angle	±1	Date	20050929	20050929	20050929	20050929

Soda Lime / Polyimide

Drawing Number: DPE2826NCF06
Material: B

Scale: 1:1
Sheet: 1 of 1
Size: A3

Item	Date	Remark
A	20050913	Original Drawing
B	20050929	Modify COF pitch Dimension